
Ebo Systems

Support brackets

Description / Applications

- Wall-mounting bracket or for rail and supports
- Glass reinforced composites supporting systems
- Halogen free
- Available range : from 100 to 950 mm
- Booster leg from 300 mm wide

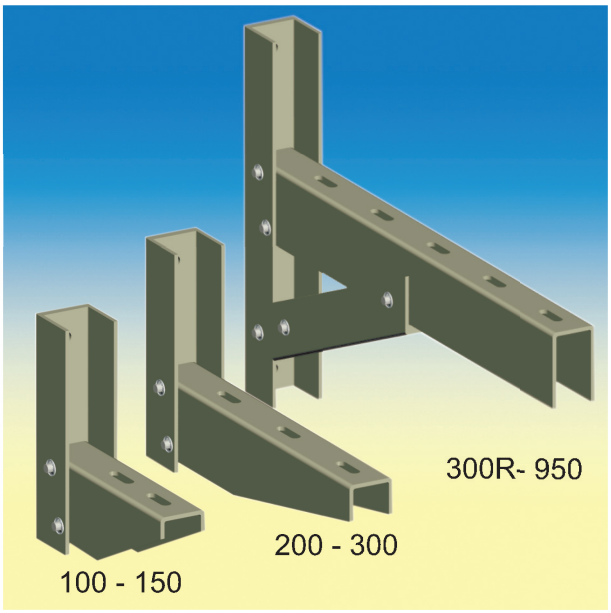

Ref FP AP...


Standard polyester mix
Technical characteristics on request
R6204/M

Standard Colour
Light grey RAL 7032 type

Working Load


According to **IEC 61537 :**

- Working Load (WL) is 1,7 times lower than breaking load.
- Maximum support deflection under working load musn't exceed 1/20th of the bracket length.

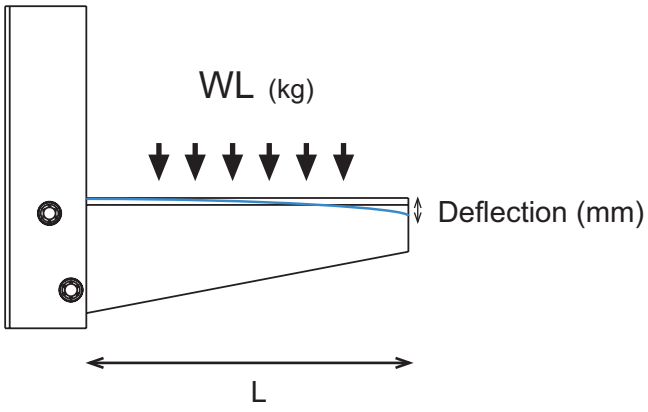


L =Bracket length
WL = Working Load


Bracket Range	WL (kg)	Deflection (mm)
Long Brackets	250	< 1/20 L
FP AP 950		11,4
FP AP 850		7,3
FP AP 750		6,7
Middle-sized Brackets	170	< 1/20 L
FP AP 600		8,0
FP AP 500		5,5
FP AP 400		3,5
FP AP 300/R		2,0
Short Brackets	120	< 1/20 L
FP AP 300		6,0
FP AP 250		3,8
FP AP 200		2,5
FP AP 150		2,1
FP AP 100		1,8

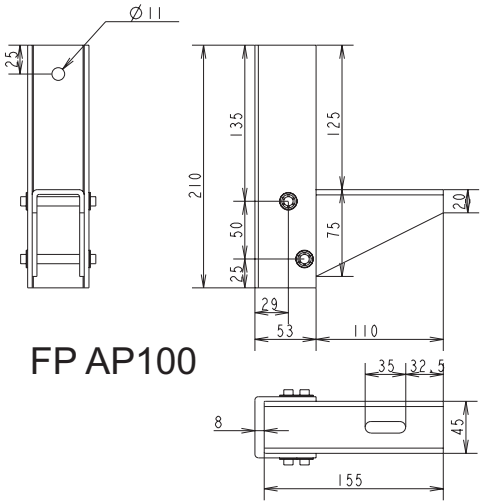


FP AP100

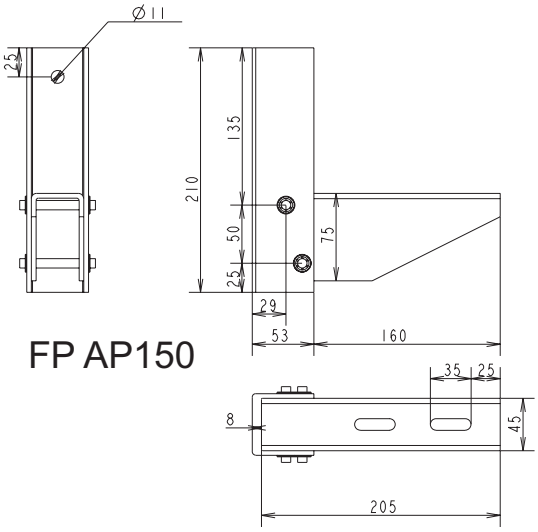


FP AP150

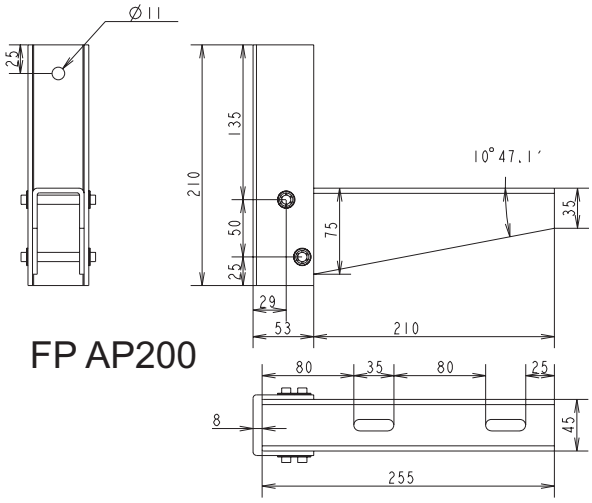

FP AP200

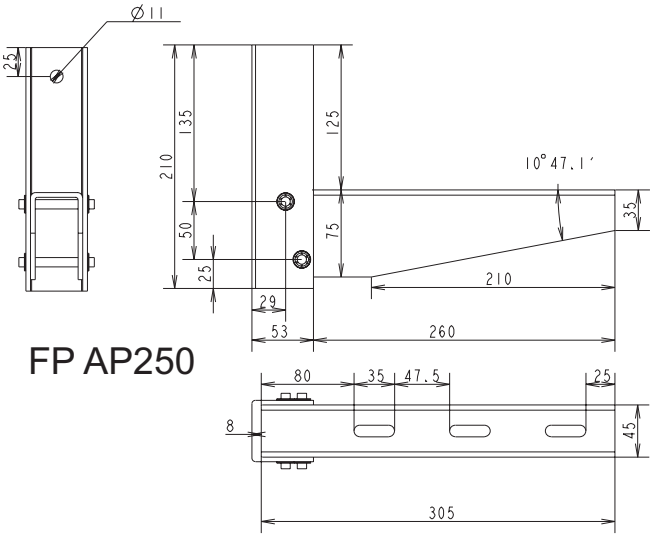


FP AP250

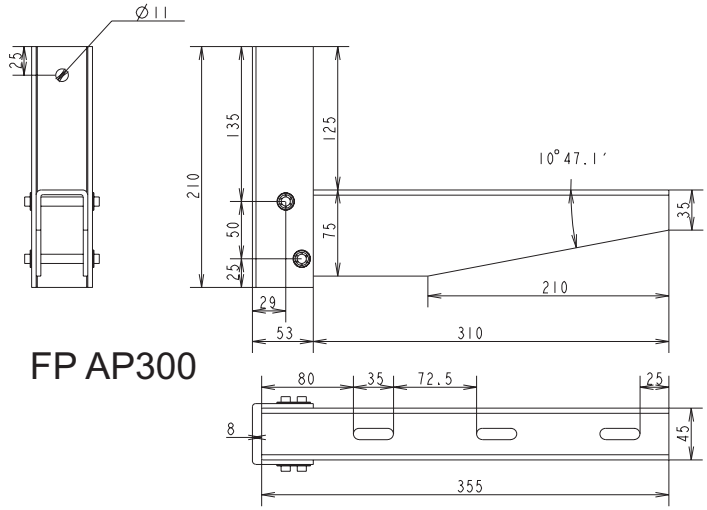



FP AP300

FP AP300/R

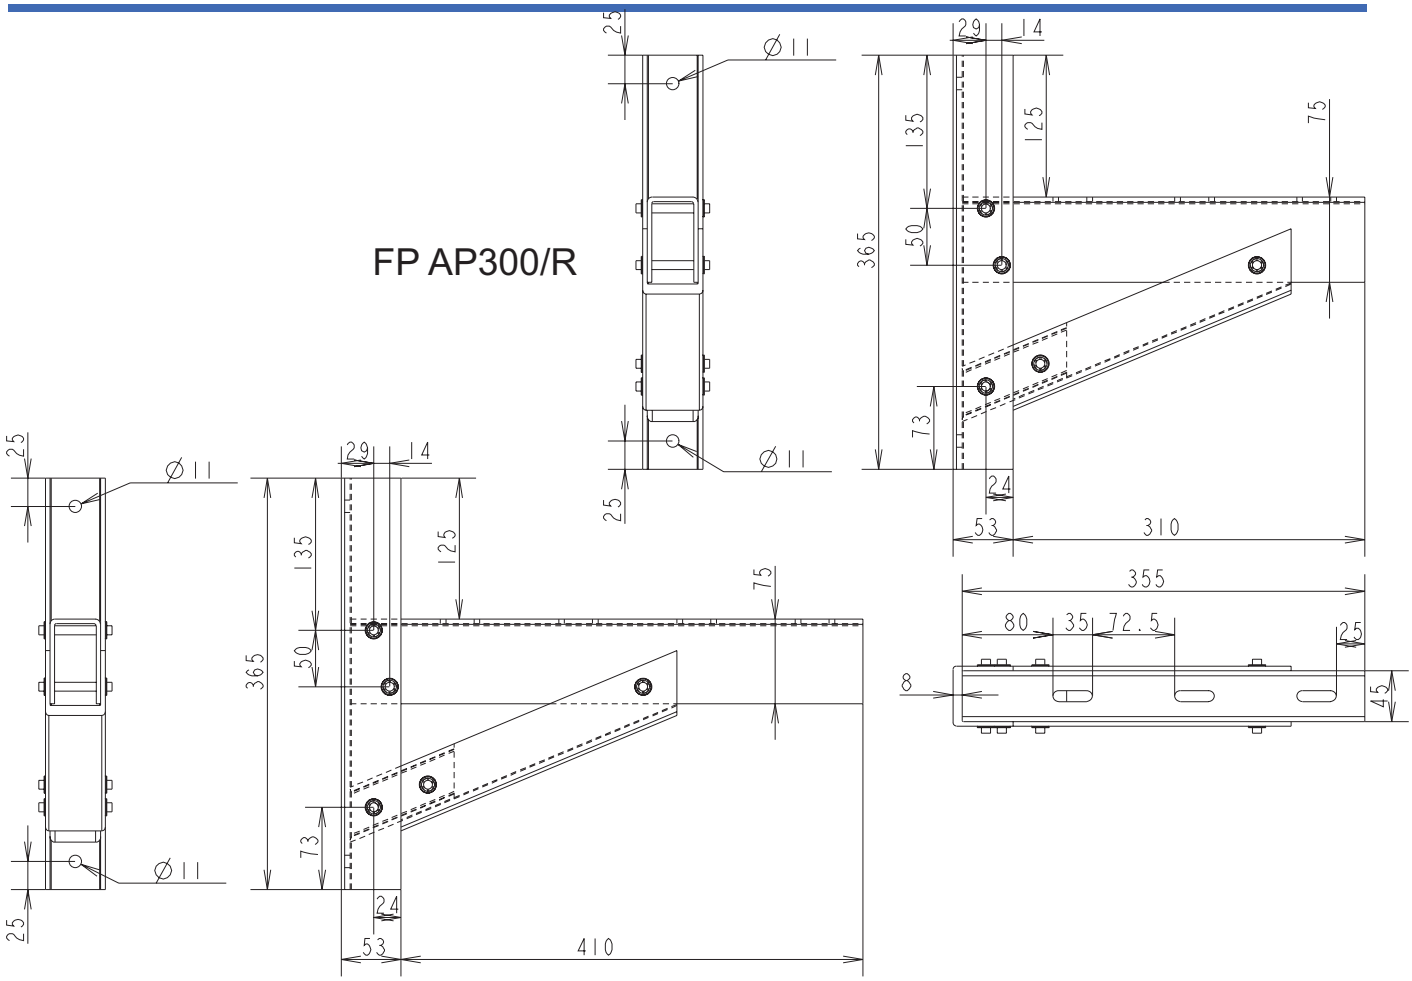


FP AP400

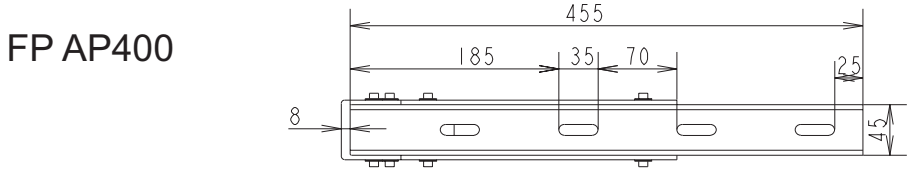


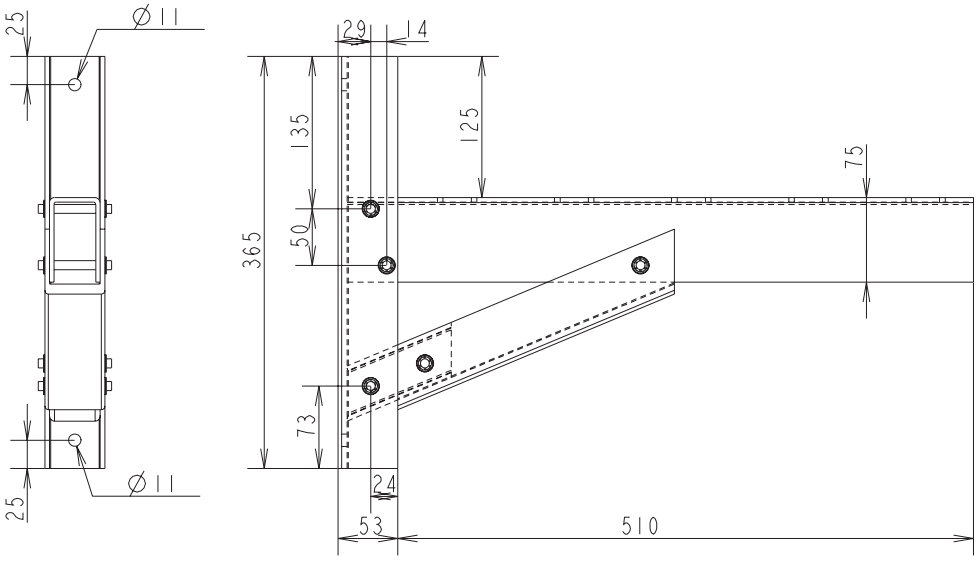


FP AP400

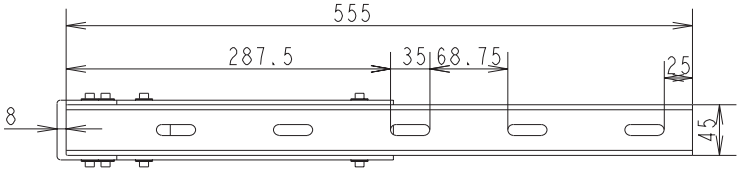


Support brackets
Middle-sized / Long brackets

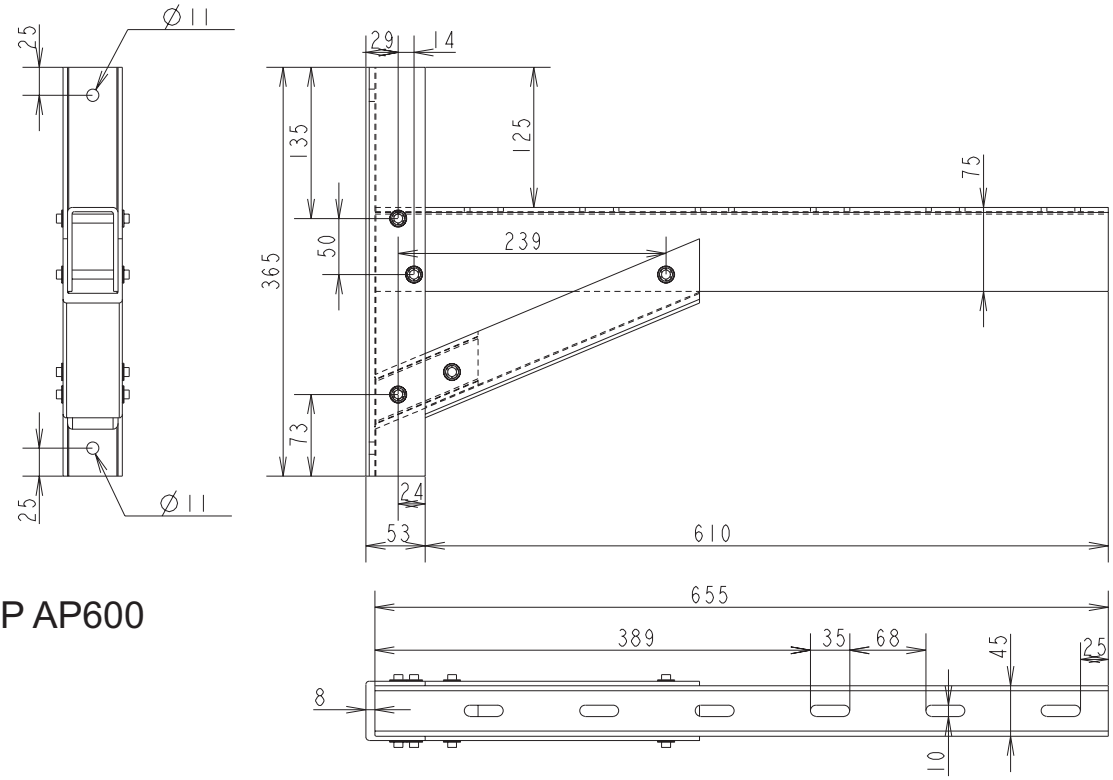


FP AP600

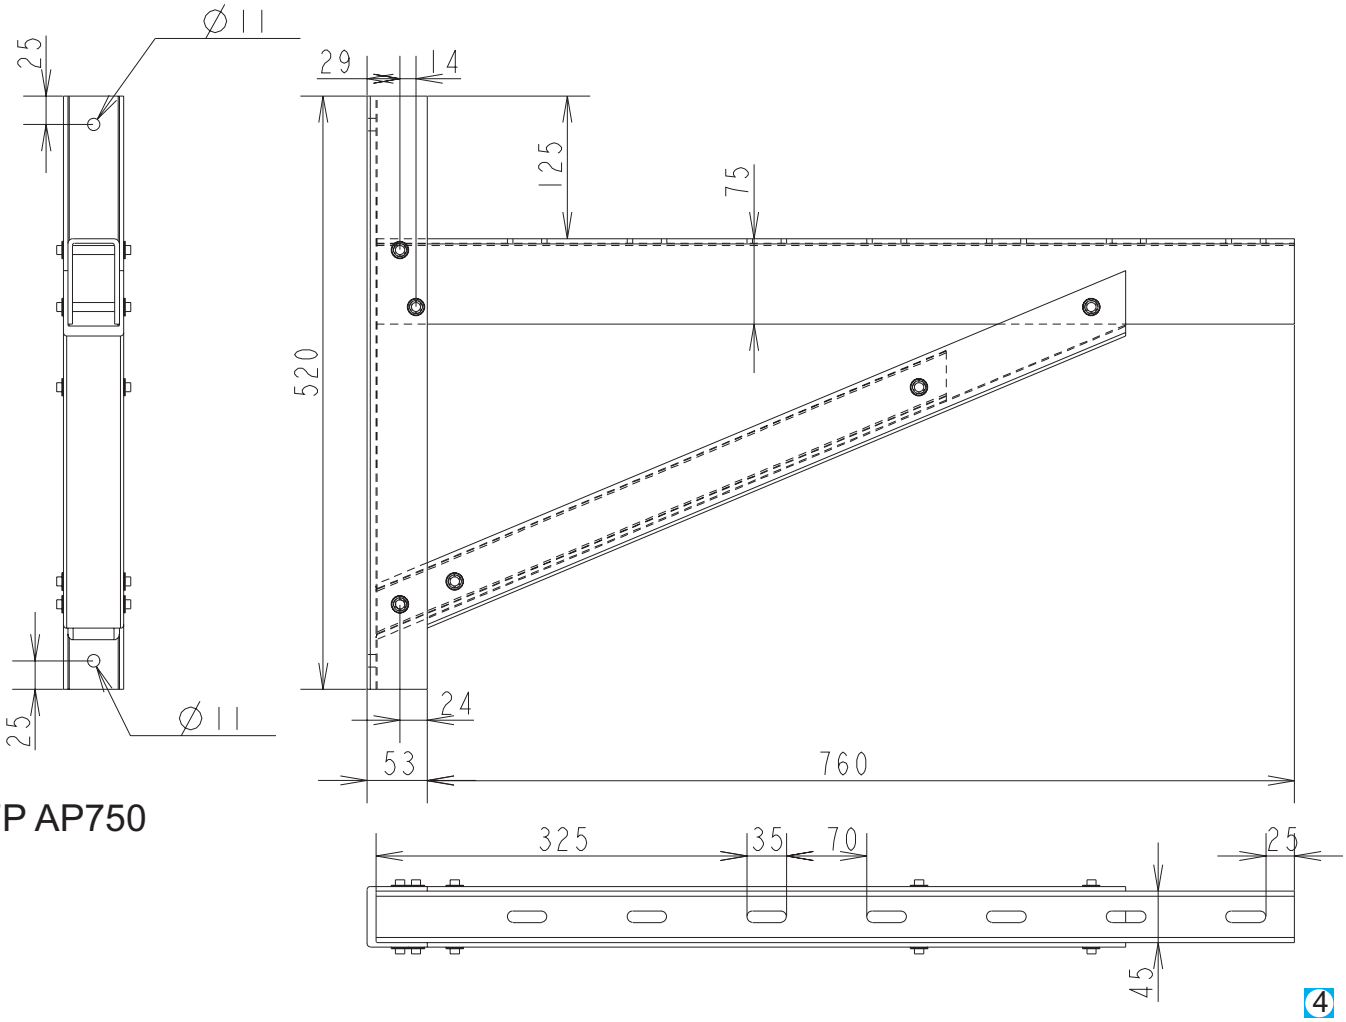

FP AP750

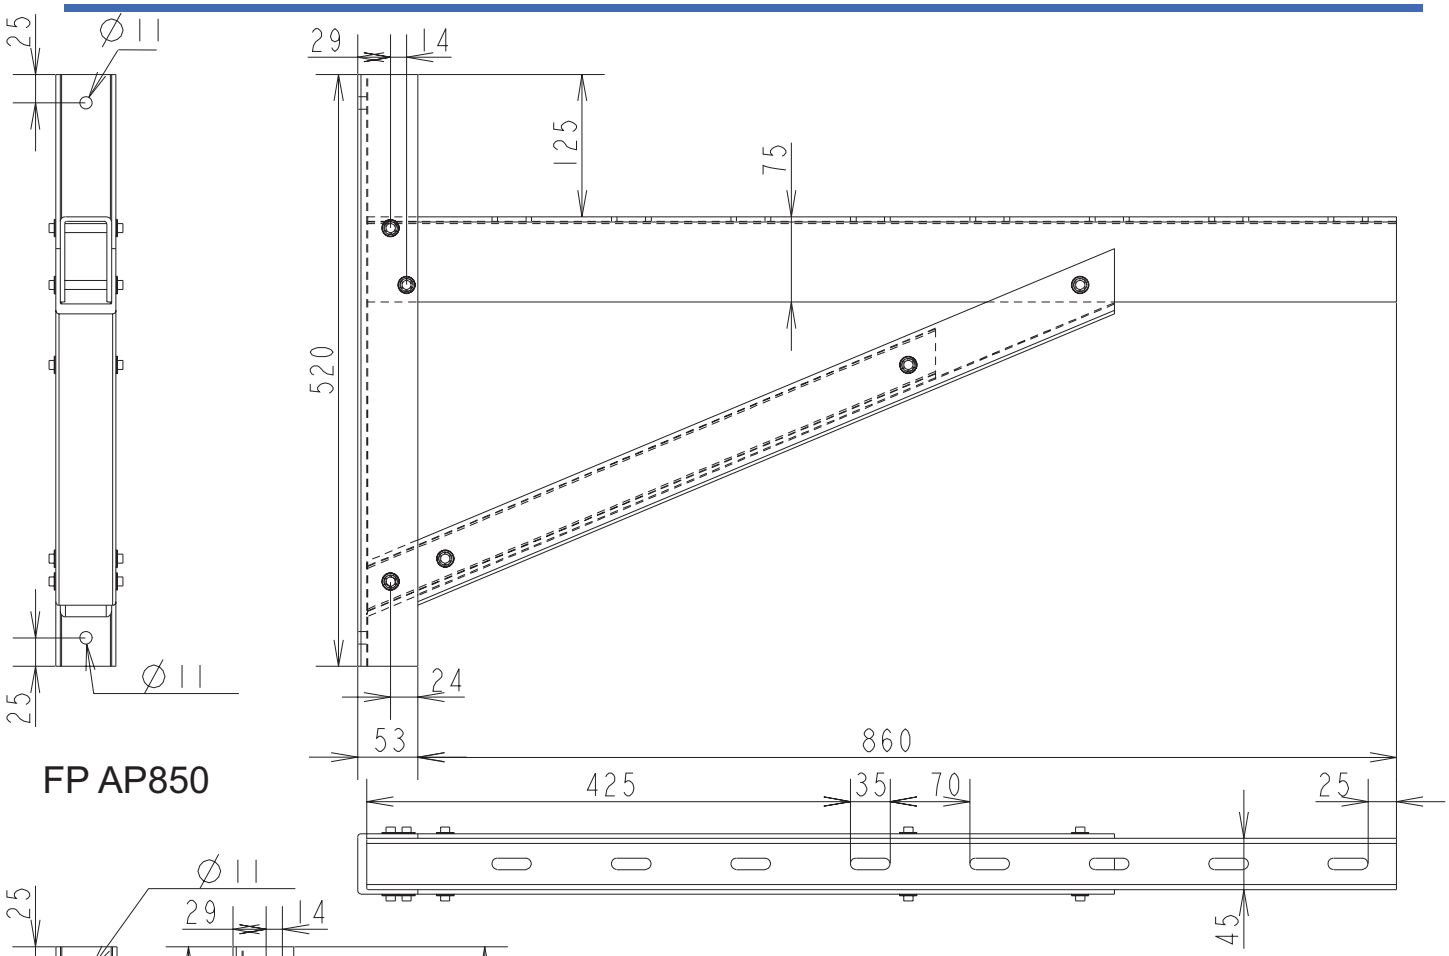

FP AP850

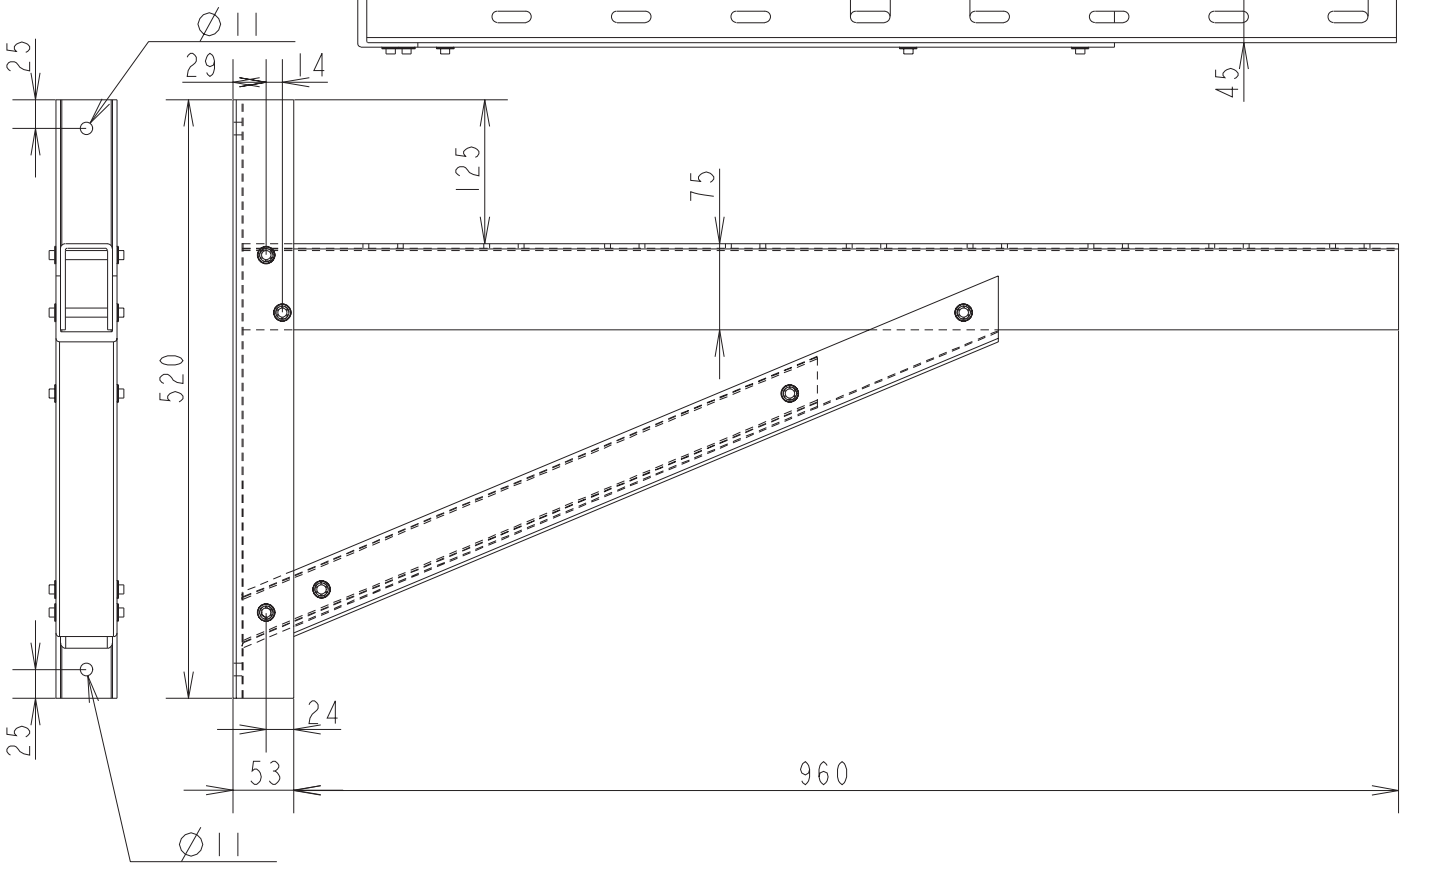

FP AP950